


## CYLINDRICAL FUSE-LINKS

## TYPE LFN

### 400/500/690 Volt Cylindrical Fuse-links to IEC 60269 2 IEC 60269 3

Rated Voltages 400V a.c., 500V a.c., 690V a.c. Breaking Capacities 20kA, 80kA, 120kA Breaking Range and Utilisation Category gG/aM

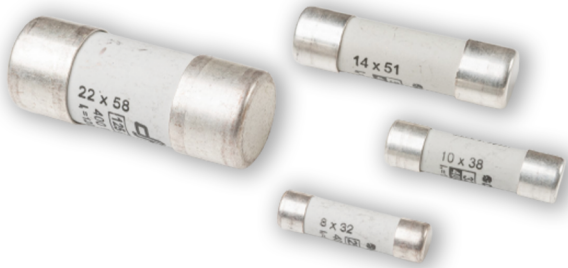

Cylindrical fuse links gG class for use as general protection against overloads and short circuits. They protect against cables, power lines and equipment.

For motor circuit protection Fuse-Links, replace 'G' by 'M' in the list reference. A range of semiconductor protection Fuse-Links is also available.



## PRODUCT DETAILS

### CURRENT RATINGS AND PRINCIPAL DIMENSIONS

| List Reference |           |         | Current Rating (A)                  | Voltage Rating (V a.c.) | Breaking Capacity (kA) | Principal Dimensions |      |
|----------------|-----------|---------|-------------------------------------|-------------------------|------------------------|----------------------|------|
| Standard       | Indicator | Striker |                                     |                         |                        | L mm                 | D mm |
| LFN8G          | LFN8GI    | -       | 2,4,6,8,10,12,16,20,25              | 400                     | 20                     | 31                   | 8    |
| LFN10G         | LFN10GI   | -       | 1,2,4,6,8,10,12,16,20,25,32         | 500                     | 120                    | 38                   | 10   |
| LFN14G         | LFN14GI   | LFN14GS | 2,4,6,8,10,12,16,20,25              | 600                     | 80                     | 51                   | 14   |
|                |           |         | 32, 40                              | 500                     | 120                    |                      |      |
|                |           |         | 50                                  | 400                     | 120                    |                      |      |
| LFN22G         | LFN22GI   | LFN22GS | 4 6 8 10 12 16 20 25 32 40 50 63 80 | 660                     | 80                     | 58                   | 22   |
|                |           |         | 100                                 | 500                     | 120                    |                      |      |
|                |           |         | 125                                 | 400                     | 120                    |                      |      |

